


Battery Replacement Instructions for 2GIG Panel

1. **Disarm** your panel.
2. Locate the power adapter and unplug from the wall.
3. Locate and remove the screw on top of the panel.
4. You will find two slots on either side of the screw. Insert a flathead screwdriver in the slots and gently twist to open the panel.
5. **Once open**, pull the front cover down (don't let go). The system will beep every 30 seconds while it is open; this is normal.
6. **Locate the hanger strap**. Place the hanger strap over the hook in the center of the back bracket, which is attached to the wall.

This will keep the panel from falling while you replace the battery.

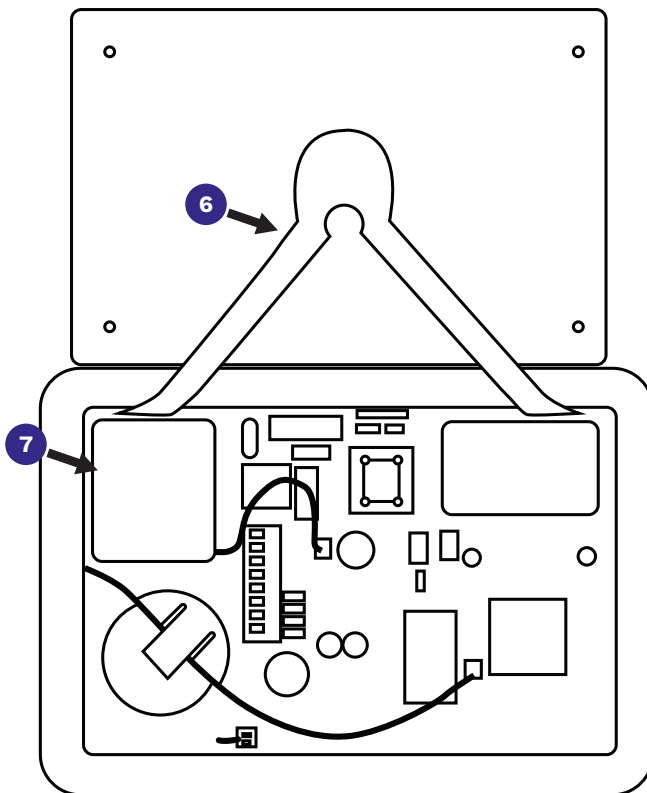

7. **Locate** the green battery pack currently in the system.
8. **Locate** the white plug that connects the red and black wire from the battery to the circuit board, and gently pull the plug straight out to remove it from the circuit board.
9. **Remove** the battery from the panel.
10. **Insert** the new battery into the panel by plugging the battery into the circuit board.
11. **Unhook** the hanger strap from the bracket.
12. **Tuck** the hanger strap and any wires back into the wall so you are able to easily close the cover.
13. **Press** the panel back into the wall bracket; it will snap into place.
14. **Replace** the screw on top of the panel.
15. **Plug** the power adapter back into the wall.

CAUTION :

Do **NOT** use a screwdriver or anything sharp that could puncture the battery.